

24 Hour Run Pump

**MP1004T24
4-inch**




Standard Features

- Low oil shut down
- Solid handling capacity up to 2 inch diameter
- Average fuel consumption 16 gallons per 24 hours

Options

- Engine air pre-filter
- Cam Lock Fittings

Specifications	
Pump	AMT
Construction	Die cast aluminum housings, cast iron impeller & volute
Mount	Fabricated steel skid with integral fuel tank, battery, battery rack, battery cables
Seal Faces	Silicon carbide & ceramic
Output	633 gpm, 120 ft total head
Size	4" x 4" (suction & discharge)
Life	Up to 20'
Engine	
Model	Yanmar L100V6DA1F1AA
Type	Air cooled, 4 cycle, vertical cylinder
Displacement	435 cc
Max Output	9.1 hp @ 3600 rpm
Cont. Output	8.3 hp @ 3600 rpm
Start System	12V electric start / recoil start back up
Combustion	Direct injection
Fuel Oil	Diesel fuel
Fuel Tank Capacity	16 gal
Lube Oil Capacity	.42 gal / 1.60 liters
Operation Capacity	24 hours
Package	
Weight	295 lbs
L x W x H	24" x 18" x 20"

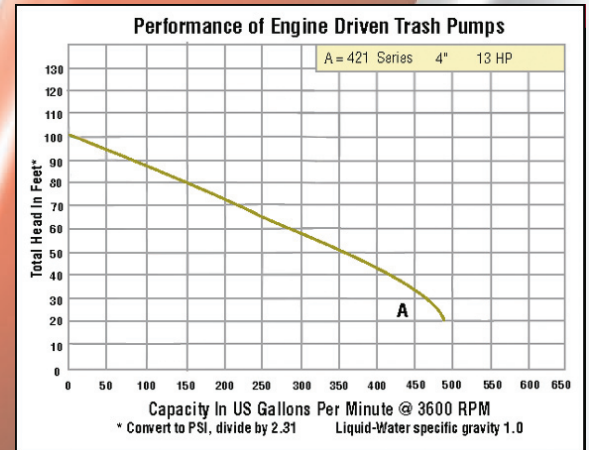

MAS POWER

www.maspowerproducts.com
7177 30th Ave North • St. Petersburg, Florida 33710
Tel. 727.522.9471 • Fax 727.381.3235
For Georgia & Alabama 229.347.8394
Toll Free 800.545.4574