



# Diaphragm Pump


**MP483DP  
3-inch**

## Standard Features

- Solid handling capacity up to 1<sup>5</sup>/<sub>8</sub> diameter
- Excellent for pumping mud, slurry, sewage, and thick liquids that have the ability to flow
- Modular component design permits easy maintenance and cleanout

## Options

- Cam Lock Fittings
- Larger fuel tank for longer run

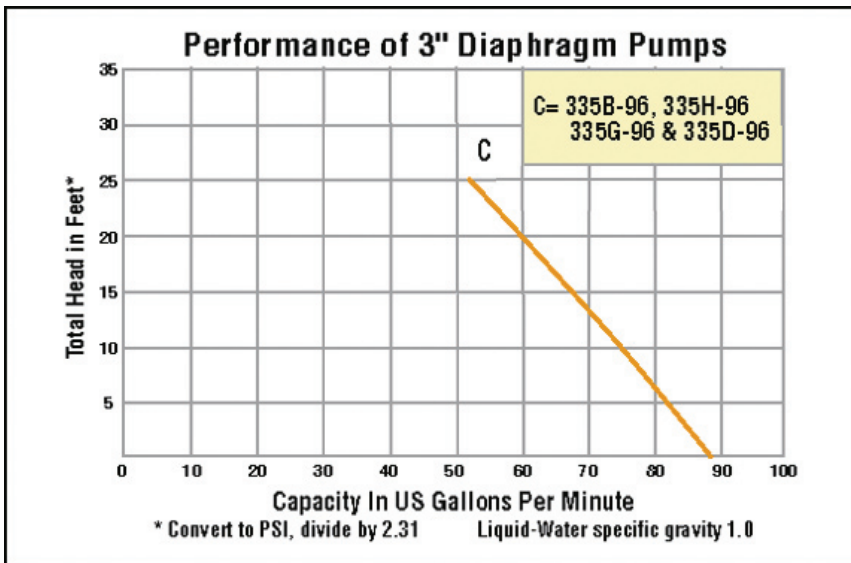

Specifications	
Pump	AMT
Construction	Sand Cast Aluminum
Diaphragm	Thermoplastic Rubber
Max Temp	180° F
Output	90 gpm
Size	3"x 3" (suction & discharge)
Lift	Up to 20' after initial prime
Engine	
Yanmar Model	L48V6CF1T1AA
Max Output	4.7 hp / 3600 rpm
Operation Capacity	Approximately 3-4 hours
Package	
Weight	229 lbs
L x W x H	24"x 19"x 24"

**MAS POWER**

www.maspowerproducts.com  
 7177 30th Ave North • St. Petersburg, Florida 33710  
 Tel. 727.522.9471 • Fax 727.381.3235  
 For Georgia & Alabama 229.347.8394  
 Toll Free 800.545.4574