

# Polypropylene Pumps





**MP482PP/MP482PPE  
MP483PP/MP483PPE**

## Standard Features

- Powder-coated Frame
- Auto-return decompression for efficient starting at all temperature conditions
- Excellent for saltwater pumping applications

## Options

- Cam-lock fittings
- Low oil shutdown on electric start only
- 10" pneumatic wheel kit
- 16" pneumatic wheel kit

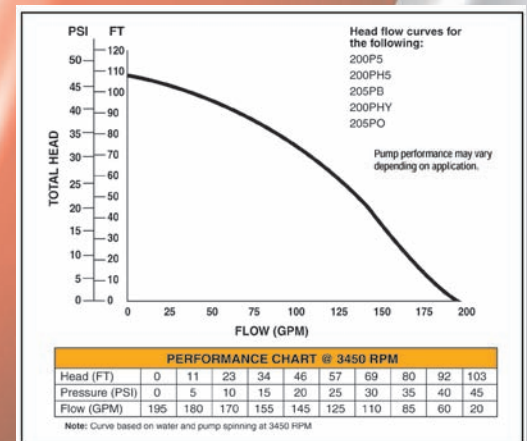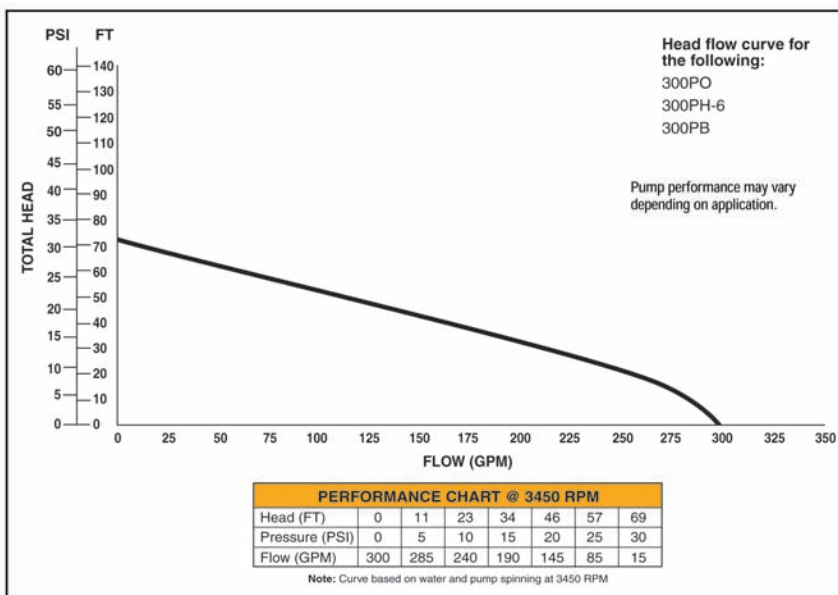

Specifications		
Pump	Banjo	
Construction	Polypropylene housings, polyester impeller, and volute	
Seals	Self-lubricating mechanical seals	
Seal Faces	Buna-N and Carbon-ceramic	
Output	2" 200 gpm 110 ft total head	3" 325 gpm 90 ft total head
Size	2"x 2" (suction & discharge)	3"x 3" (suction & discharge)
Pressure	Up to 40 PSI	
Engine		
Yanmar Model	L48V6CF1T1AA / L48V6CA1T1AA	
Max Output	4.7 hp @ 3600 rpm	
Operation Capacity	Approximately 3-4 hours	
Package		
Weight	110 lbs • 126 lbs electric	
L x W x H	24" x 19" x 24"	

**MAS POWER**

www.maspowerproducts.com  
7177 30th Ave North • St. Petersburg, Florida 33710  
Tel. 727.522.9471 • Fax 727.381.3235  
For Georgia & Alabama 229.347.8394  
Toll Free 800.545.4574